

MH103-1B




VIBRATION ANALYSIS HARDWARE

Flat Surface Magnet Mounting Base with 1/4-28 Integral Mounting Stud, 40 lbs. (18 kg) Pull Strength, 1.00 in. (25.4 mm) OD, 0.46 in. (11.68 mm) Height



Product Features

- ▶ Durable 17-4 Stainless Steel case and mounting stud
- ▶ High Strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Maximum frequency response up to 10 kHz when paired with MH133-1A mounting target

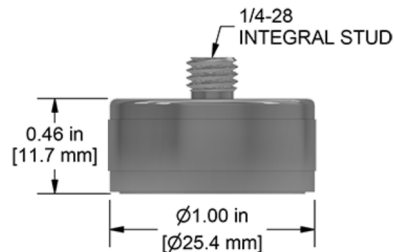

Specifications

Max Temperature	266 °F (130 °C)
Case Material	17-4 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.00 in. (25 mm) OD, 0.46 in. (11.7 mm) Height
Pull Strength	40 lbs. (18 kg)
Sensor Mounting	1/4-28 Integral Stud

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all top exit sensors with 1/4-28 mounting holes

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900